



West Roofing Systems Inc.

75
70
65
60

23
27
30
34
38
41

FEET


Municipalities and Government

First, the gravel was vacuumed from the built-up roof surface. Next 1½ inches of polyurethane foam insulation was spray-applied using Silver Eagle robotic technology. Finally, 20 mils of silicone coating with ceramic granules is applied. This project received a 10 year manufacturers warranty.

For more information call:
Jack Moore
800-356-5748 x102
jackm@westroofingsystems.com
Job #23151



This 45,000 sq. ft. roof was completed in just seven days.

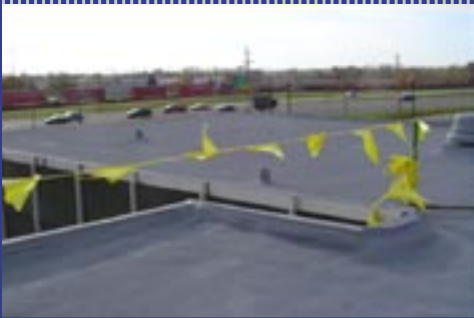

121 Commerce Drive
PO Box 505
LaGrange, OH 44050

Phone: 800.356.5748
Fax: 440.355.8106
www.westroofingsystems.com